CentralGroup
ROOFING & BUILDING SOLUTIONS

Student Central, University of Huddersfield.

Located at the heart of the University of Huddersfield campus, Student Central remained operational while Central refurbished multiple roof areas, including the green roof, liquid-applied roofs, boardroom roof, canopy and patio areas.

Green Roof Replacement
Liquid Roof Installation
Principal Contractor

Extensive Sedum System
Garland Dura-coat
Permanent Mansafe System

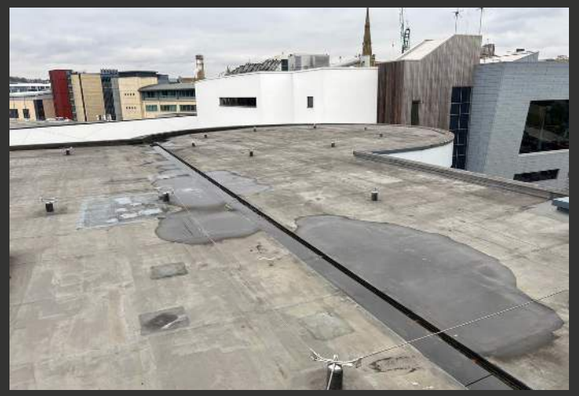

The Project.

The existing waterproofing systems and green roof had reached the end of their serviceable lives. Central was appointed as Principal Contractor to deliver coordinated refurbishment works across approximately 1,776m² of varied roof areas.

Delivery.

Central stripped and renewed waterproofing across the main roof, boardroom roof, canopy and patio areas using Garland Dura-Coat. The existing insulation was reused where possible, and the extensive sedum green roof was fully reinstated.

The Result.

The refurbishment created a coordinated, durable waterproofing solution across the building's multiple roof areas. The reinstated green roof restored biodiversity and rainwater attenuation, while improved roof safety systems support future inspection and maintenance.

www.centralroofing.co.uk

Making Buildings Perform Better.