CentralGroup
ROOFING & BUILDING SOLUTIONS

Milefield Primary School.

Barnsley Metropolitan Borough Council appointed Central Group to refurbish the ageing building envelope at Milefield Primary School, replacing roofing, cladding, rooflights and rainwater systems while keeping the school and adjoining Family Hub fully operational.

Structural Steel Installation
Liquid-applied Waterproofing
Rooflight Replacement

Joris Ide Structural Decking
Alumasc Caltech Liquid
Brett Martin Rooflights

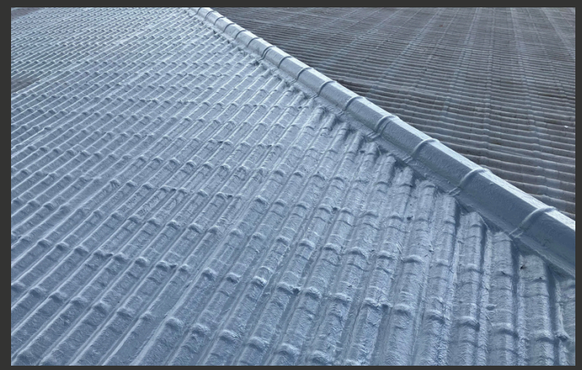

The Project.

The 2,000m² refurbishment combined several roofing disciplines, including reconstruction of the central apex roof, waterproofing lower roof areas, overcladding elevations, renewing rainwater goods and installing a permanent fall arrest system for safe future maintenance.

Delivery.

Working within a live school required carefully phased construction around term dates and holidays. Scaffold protection, internal crash decks, exclusion zones and managed deliveries allowed work to progress safely while protecting pupils, staff and visitors.

The Result.

The completed refurbishment created a safer, warmer and more energy-efficient school. New roofing, insulated cladding and non-fragile rooflights improved weather resistance, reduced future maintenance requirements and modernised the building's overall appearance.

www.centralroofing.co.uk

Making Buildings Perform Better.